

# **WARNING** **BATTERIES PRODUCE** **EXPLOSIVE GASES**

Keep sparks, flames and cigarettes away from batteries at all times.  
Wear eye protection. Don't lean over batteries during jump-starting. See owner's manual for instructions.



NO SMOKING



WEAR EYE PROTECTION


## **JUMP-START INSTRUCTIONS**

Be sure: vent caps are tight and level...damp cloth, if available, is placed over vent caps...vehicles are not touching...both electrical systems are the same voltage.  
**Don't Jump-Start If Fluid is Frozen!**

### **ATTACHING THE CABLES**

(Do in order listed):

- 1** Clamp one jumper cable to positive (+) terminal of dead battery. Do not allow positive cable clamps to touch any metal other than battery terminals.
- 2** Connect positive (+) cable to positive (+) terminal of good battery.
- 3** Connect second cable [negative (-)] to other terminal [negative (-)] of good battery.
- 4** Make final connection on engine block of stalled vehicle (not to negative post) away from battery, carburetor, fuel line, any tubing or moving parts.

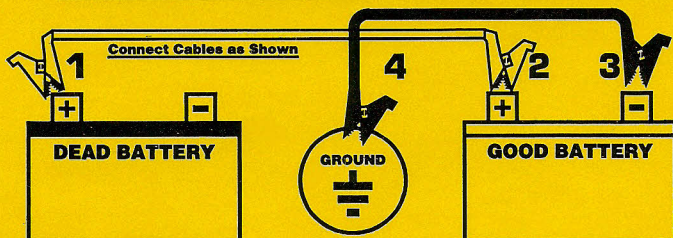

- 5** Stand back from both vehicles. Start vehicle with good battery—then start the disabled vehicle.
- 6** Remove cables in reverse order of connections beginning by first removing cable from engine block or metallic ground.



PREVENT BLINDNESS®

HB15

National Office:

PREVENT BLINDNESS AMERICA®

500 E. REMINGTON ROAD, SCHAUMBURG, IL 60173

© 1995 BY PREVENT BLINDNESS AMERICA®

Use CAUTION and SAFETY EYEWEAR  
when jump-starting vehicle.

10/99 50M

Place in glove compartment or  
other clean, dry location.